

Z-XOTKtsd 2 - 288 Optical Fibre tube

1.8

EN 60794-3

Spec. No. 2557/1/0 MB


2020.07.21, page 1/2

Type: outdoor, fully dielectric



Cable construction:

1. Central element, non-metallic
2. Optical fibres
3. Loose tube
4. Filler
5. Waterblocking tape
6. Outer sheath
7. Ripcord

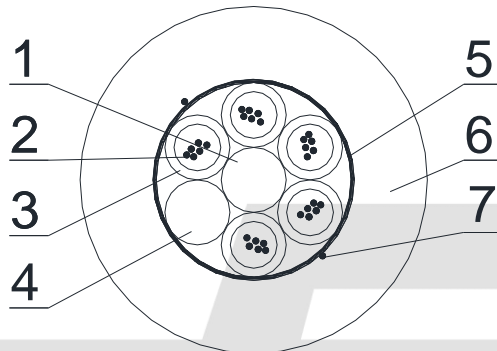

CONSTRUCTION			
Element	Type	Material	Dimensions
Fibres	ITU-T G.652D , ITU-T G.657A or according to the attached specifications		
Identification of fibres	comply to IEC 60304: red; green, blue, white, violet, orange, grey, yellow, brown, pink, black turquoise		
Identification of tubes/elements 6 to 12 elements Above 12 elements - two layers 18 elements (6+12) 24 elements (9+15)	first tube - red, second tube - blue, other tube - natural, filler (when needed) - black the above sequence of colours repeats in every layer		
Central support member	straight rod	Fibre Reinforced Plastic	1.8mm, 2.5mm or 3.0mm
PE oversheath on the central support member	black	HDPE	φ 5.3mm for 12-element cable φ 3.5 mm for 9+15-element cable
Secondary coating	loose tube - thermoplastic material 2-12 fibres	PBT	φ 1.8 mm (approx.)
Filling of the tube	gel	tixotropic gel	
Interstitial waterblocking	dry sealed	swelling tape	Thickness: 0.15 mm
Outer sheath	black	extruded HDPE polymer density ≥ 0.945 g/cm ³	thickness: minimum spot average
Attenuation @1310 nm	≤ 0.4 dB/km *)		
Attenuation @1550 nm	≤ 0.25 dB/km *)		
Marking/Printing:	FIBRE OPTIC CABLE Z-XOTKtsd 24J TF Kable 1 year of production (or according to the agreement). Length marking every metre.		
Standard delivery lengths	2100; 4200 ±50 m on wooden drums		

*) Max attenuation for SMF in cable - other parameters of the fibre according to the attached specifications

Z-XOTKtsd 2 - 288 Optical Fibre tube

1.8

EN 60794-3

Spec. No. 2557/1/0 MB

2020.07.21, page 2/2



PARAMETERS

No. of fibres in a cable	Outer diameter of tube [mm]	No. of elements in a cable (tubes/filers)	Cable dimensions		Mechanical properties			
			Outer diameter [mm]	Cable weight [kg/km]	Max. tensile load [N]		Min. bending radius [mm]	
					Dynamic (during installation)	Static (during the operation)	Dynamic (during installation)	Static (during the operation)
4 - 72	1,8	6	8	50	1000	500	120	160
74 - 96	1,8	8	9,2	70	1500	750	140	180
98 - 144	1,8	12	11,5	105	2200	1100	170	230
146 - 216	1,8	18 (6+12)	11,9	110	1000	500	180	240
218 - 288	1,8	24 (9+15)	13,6	140	2500	1250	200	270

ADDITIONAL MECHANICAL PROPERTIES

Test	Standard	Value	Acceptance criteria
Crush	IEC 60794-1-2-E3	1500 N; t =15 min	$\Delta\alpha \leq 0.05$ dB, no damage
Impact	IEC 60794-1-2-E4	5 Nm, 3 impacts	$\Delta\alpha \leq 0.05$ dB after the test
Repeated bending	IEC 60794-1-2-E6	R=20xD; F=100 N 100 cycles, 90 °, 15 cycles/min	$\Delta\alpha \leq 0.1$ dB, no damage
Torsion	IEC 60794-1-2-E7	100 N, 5 cycles, 360	$\Delta\alpha \leq 0.05$ dB, no damage

ENVIRONMENTAL SPECIFICATIONS

Water penetration	IEC 60794-1-2-F5B	sample 1 m, water head 1 m, 24 hours
Temperature range		- transport/storage -40/+70 °C - installation -15/+60 °C - operation -30/+70 °C

FEATURES

- fully dielectric
- resistant to electromagnetic interferences
- secured from longitudinal water penetration
- resistant to abrasion, UV and stress corrosion

APPLICATIONS

Cable is designated for a long distance transmission of digital and analogue signals within the whole optical bandwidth used in wide and local telecom networks of any spatial configuration. Suitable for use in primary and secondary cable ducts or in the proximity to HV lines.

All information contained in this document, including the tables and drawings, are provided for information only and not a commercial offer; nor may it constitute the basis for pursuing any claim against TELE-FONIKA KABLE S.A.

TELE-FONIKA Kable S.A.

www.tfkable.com