

Fiber Optic Cable


WD-NOTKMd 4-144 fibres

ZN/17-OPL-005-2; IEC/EN 60793; IEC/EN 60794-1

Spec. No. TT1-3034/4/0 MB

19.08.2020, page 1/2

Type: indoor, easy access

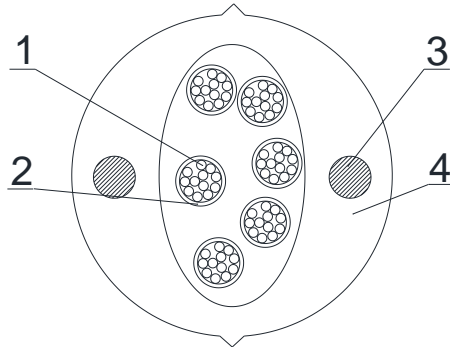

Cable construction:

1. Optical fibre
2. Micromodule
3. Strength member FRP
4. Outer jacket

CONSTRUCTION			
Element	Type	Material	Dimension
Fibres	ITU-T G.657A2 or according to the attached specifications		
Identification of fibers	Comply to IEC 60304: Red, Blue, White, Green, Violet, Orange, Grey, Yellow, Brown, Pink, Black, Turquoise		
Tube identification	Red, Blue, White, Green, Violet, Orange, Grey, Yellow, Brown, Pink, Black, Turquoise		
Secondary coating	Micromodule	Flexible, easy peel compound	ϕ 0.9 mm for 4 fibres ϕ 1.0 mm for 6 fibres ϕ 1.2 mm for 8 fibres ϕ 1.3 mm for 12 fibres
Strength Members	Dielectric rod	FRP	ϕ 0.9 mm or ϕ 1.0 mm (approx.)
Outer sheath	White	LSOH	thickness: minimum spot 0.70mm
Attenuation @1310nm	$\leq 0,40$ dB/km *)		
Attenuation @1550nm	$\leq 0,35$ dB/km *)		
Temperature range	- transport and storage - installation - operation		-40/+70 °C 0/+55 °C -5/+60 °C
Marking/Printing:	KABEL OPTYCZNY WD-NOTKMd 6x12J7A2 TF Kable 1 year of production (or according to the agreement). Length marking every metre		
Standard delivery lengths	2100 ± 100 m; to be agreed		

*) Max attenuation for SMF in cable - other parameters of the fiber according to the attached specifications

Fiber Optic Cable

WD-NOTKMD 4-144 fibres

ZN/17-OPL-005-2; IEC/EN 60793; IEC/EN 60794-1

Spec. No. TT1-3034/4/0 MB

19.08.2020, page 2/2



No. of fibres in a cable	CPR - class reaction to fire (acc EN 50575)	Cable dimensions		Mechanical properties			
		Outer diameter [mm]	Cable weight [kg/km]	Max. tensile load [N]		Min. bending radius [mm]	
				Dynamic (during instalation)	Static (during the operation)	Dynamic (during instalation)	Static (during the operation)
1 x 4	Dca-s2,d0,a1	6.8 ± 0.3	45	450	200	100	130
1 x 6	Dca-s2,d0,a1	6.8 ± 0.3	45	450	200	100	130
1 x 8	Dca-s2,d0,a1	6.8 ± 0.3	45	450	200	100	130
1 x 12	Dca-s2,d0,a1	6.8 ± 0.3	45	450	200	100	130
2 x 4	Dca-s2,d0,a1	6.8 ± 0.3	45	450	200	100	130
2 x 6	Dca-s2,d0,a1	6.8 ± 0.3	45	450	200	100	130
2 x 8	Dca-s2,d0,a1	6.8 ± 0.3	45	450	200	100	130
2 x 12	Dca-s2,d0,a1	6.8 ± 0.3	45	450	200	100	130
3 x 4	Dca-s2,d0,a1	6.8 ± 0.3	45	450	200	100	130
3 x 6	Dca-s2,d0,a1	6.8 ± 0.3	45	450	200	100	130
3 x 8	Dca-s2,d0,a1	6.8 ± 0.3	45	450	200	100	130
3 x 12	Dca-s2,d0,a1	6.8 ± 0.3	45	450	200	100	130
4 x 4	Dca-s2,d0,a1	6.8 ± 0.3	45	450	200	100	130
4 x 6	Dca-s2,d0,a1	6.8 ± 0.3	45	450	200	100	130
4 x 8	Dca-s2,d0,a1	6.8 ± 0.3	45	450	200	100	130
4 x 12	Dca-s2,d0,a1	6.8 ± 0.3	45	450	200	100	130
5 x 4	Dca-s2,d0,a1	8.5 ± 0.3	65	700	350	125	170
5 x 6	Dca-s2,d0,a1	8.5 ± 0.3	65	700	350	125	170
5 x 8	Dca-s2,d0,a1	8.5 ± 0.3	65	700	350	125	170
5 x 12	Dca-s2,d0,a1	8.5 ± 0.3	65	700	350	125	170
6 x 4	Dca-s2,d0,a1	8.5 ± 0.3	65	700	350	125	170
6 x 6	Dca-s2,d0,a1	8.5 ± 0.3	65	700	350	125	170
6 x 8	Dca-s2,d0,a1	8.5 ± 0.3	65	700	350	125	170
6 x 12	Dca-s2,d0,a1	8.5 ± 0.3	65	700	350	125	170
7 x 4	Dca-s2,d0,a1	10.5 ± 0.3	90	950	450	150	210
7 x 6	Dca-s2,d0,a1	10.5 ± 0.3	90	950	450	150	210
7 x 8	Dca-s2,d0,a1	10.5 ± 0.3	90	950	450	150	210
7 x 12	Dca-s2,d0,a1	10.5 ± 0.3	90	950	450	150	210
8 x 4	Dca-s2,d0,a1	10.5 ± 0.3	90	950	450	150	210
8 x 6	Dca-s2,d0,a1	10.5 ± 0.3	90	950	450	150	210
8 x 8	Dca-s2,d0,a1	10.5 ± 0.3	90	950	450	150	210
8 x 12	Dca-s2,d0,a1	10.5 ± 0.3	90	950	450	150	210
9 x 4	Dca-s2,d0,a1	10.5 ± 0.3	90	950	450	150	210
9 x 6	Dca-s2,d0,a1	10.5 ± 0.3	90	950	450	150	210
9 x 8	Dca-s2,d0,a1	10.5 ± 0.3	90	950	450	150	210
9 x 12	Dca-s2,d0,a1	10.5 ± 0.3	90	950	450	150	210
10 x 4	Dca-s2,d0,a1	10.5 ± 0.3	90	950	450	150	210
10 x 6	Dca-s2,d0,a1	10.5 ± 0.3	90	950	450	150	210
10 x 8	Dca-s2,d0,a1	10.5 ± 0.3	90	950	450	150	210
10 x 12	Dca-s2,d0,a1	10.5 ± 0.3	90	950	450	150	210
11 x 4	Dca-s2,d0,a1	10.5 ± 0.3	90	950	450	150	210
11 x 6	Dca-s2,d0,a1	10.5 ± 0.3	90	950	450	150	210
11 x 8	Dca-s2,d0,a1	10.5 ± 0.3	90	950	450	150	210

Fiber Optic Cable

WD-NOTKMD 4-144 fibres

ZN/17-OPL-005-2; IEC/EN 60793; IEC/EN 60794-1

Spec. No. TT1-3034/4/0 MB

19.08.2020, page 3/2



11 x 12	Dca-s2,d0,a1	10.5 ± 0.3	90	950	450	150	210
12 x 4	Dca-s2,d0,a1	10.5 ± 0.3	90	950	450	150	210
12 x 6	Dca-s2,d0,a1	10.5 ± 0.3	90	950	450	150	210
12 x 8	Dca-s2,d0,a1	10.5 ± 0.3	90	950	450	150	210
12 x 12	Dca-s2,d0,a1	10.5 ± 0.3	90	950	450	150	210

ADDITIONAL MECHANICAL PROPERTIES

Test	Standard	Value	Acceptance Criteria
Crush	IEC 60794-1-2-E3	2000 N ; t =5 min	$\Delta\alpha \leq 0.05$ dB, no damage
Impact	IEC 60794-1-2-E4	1.0 Nm , 3 impacts	$\Delta\alpha \leq 0.05$ dB after the test
Repeat Bending	IEC 60794-1-2-E6	R=20xD; F=40N 100 cycles, 90°, 15 cycles /min	$\Delta\alpha \leq 0.1$ dB, no damage
Torsion	IEC 60794-1-2-E7	100N, 5 cycles, 360°	$\Delta\alpha \leq 0.05$ dB, no damage

FIRE RESISTANT

Flame propagation	IEC 60332-3-24
Corrosive gas emission	BS EN 60754-2, EN 60754-2, pH $\geq 4,3$; conductivity $\leq 2,5$ $\mu\text{S}/\text{mm}$: a1
Smog density	IEC 61034-2 light transmittance values : s2

FEATURES

- light and durable
- easy strippable secondary coating
- easy access to cable modules
- resistant to electromagnetic interferences
- UV resistant

APPLICATIONS

Cables are designated for transmission of digital and analogue signals within the whole optical bandwidth used in the local, metropolitan and wide area networks.

- external access networks
- modern FTTH & cctv
- subscriber connections

All information contained in this document, including the tables and drawings, are provided for information only and not a commercial offer; nor may it constitute the basis for pursuing any claim against TELE-FONIKA KABLE S.A.

TELE-FONIKA Kable S.A.

www.tfkable.com